

# REAR CAMERA WIRELESS

## USER MANUAL

### **CAM704W**

Rear Camera wireless for RMW704RK or monitor M704R




# MACROM

## Connections

---

### Wi-Fi Antenna

1. Connect the Wifi antenna (A), 2.4 Ghz.

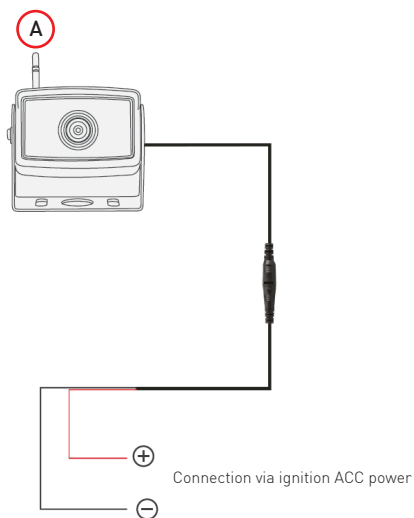

### Power

1. Connect the camera harness to your vehicle's ignition service.

#### Note:

Permanent direct connection to battery positive could lead to discharge of the vehicle battery in the long run.

2. Make sure there is a 10 Ampere protection fuse.


## Rear view camera pairing

### Important note

The CAM704W model is compatible with the M704R monitor or with the RMW704KR kit

Before proceeding with use, it is necessary to pair the rear view camera using the pairing function present in the monitor settings which are shown below.

1. Using the key (CH) select the channel to which you want to connect the camera.




2. Enter the menu and select PAIRING to pair.

Press the SEL key to confirm the procedure.



3. The monitor shows the pairing procedure via "countdown" on the screen



4. At the end, the image of the previously paired camera will be displayed.



#### NOTE:

If you need to pair more cameras, please repeat the above procedure again selecting the corresponding channel.

# Installation

## Camera installation

Choose the position of the camera on the vehicle and before drilling the holes in the frame necessary for fixing the U-shaped support, make sure that there are no underlying impediments such as air tube or electrical wiring.



## Specifications

Camera	
Sensor .....	1/3" AHD
Resolution .....	1280*720
Viewing angle .....	110°[H] 140°[D]
Waterproof .....	IP68
Night lighting .....	IR (infrared)
Night vision distance .....	5 meters
Wifi	
Integrated Wi-Fi .....	2.4G wireless
Network range .....	2403-2480MHz
Distance .....	≤ 200m in open field
Compatibility	
Models.....	RMW704KR / M704R

